

Εργαστήριο Space Data Systems

3^ο Εργαστηριακό Μάθημα

Βασιλόπουλος Διονύσης

ΕΔΙΠ Τμήματος Πληροφορικής & Τηλεπικοινωνιών - ΕΚΠΑ


3^η Εργαστηριακή Άσκηση

Να σχεδιάσετε, να προσομοιώσετε και να υλοποιήσετε μία **Αριθμητική και Λογική Μονάδα (ALU)**, η οποία είτε θα προσθέτει δύο μη προσημασμένους αριθμούς (σήματα a και b) των 3 bit είτε θα διπλασιάζει το a. Το τι πράξη θα κάνει εξαρτάται από ένα σήμα ελέγχου (ctr) του ενός bit. Όταν η τιμή του είναι '1' τότε κάνει την πρόσθεση ενώ όταν είναι '0' τότε κάνει το διπλασιασμό του a. Το αποτέλεσμα αποθηκεύεται στο σήμα result των 4 bit (άρα δεν θα ασχοληθείτε με το θέμα του overflow/carry γιατί το αποτέλεσμα χωράει στα 4bit). Η είσοδος θα γίνεται με τους διακόπτες (SW0, SW1, SW2 για το σήμα a, τους διακόπτες SW3, SW4, SW5 για το σήμα b και το διακόπτη SW6 για το σήμα ctr) και η έξοδος θα εμφανίζεται τόσο στα led (LD0, LD1, LD2, LD3) όσο και στην κάρτα rmod. Για την επιλογή του ψηφίου στο rmod στο οποίο θα εμφανίσετε το αποτέλεσμα θα χρησιμοποιήσετε το διακόπτη SW7(digit_selection_in και digit_selection_out η είσοδος και η έξοδος αντίστοιχα τύπου std_logic).

ΠΡΟΣΟΧΗ: Στο Pmod στο ένα ψηφίο φτάνουμε έως το 9

3^η Εργαστηριακή Άσκηση

VHDL – 7 segment led

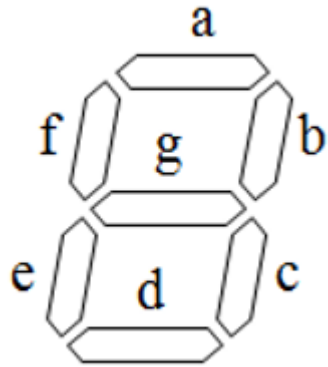


Αναπαράσταση με 7-bit
MSB->g - LSB->a

g-f-e-d-c-b-a

3^η Εργαστηριακή Άσκηση

VHDL – 7 segment led

– Τμήματα: (g, f, e, d, c, b, a)

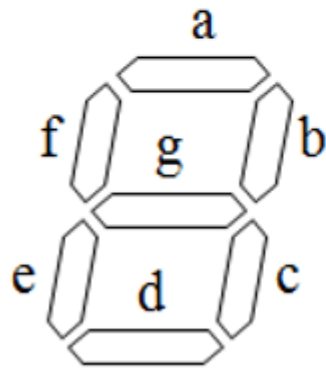


0111111


0000110


1011011


1001111


1100110


1101101


1111101


0000111



1111111


1101111

3^η Εργαστηριακή Άσκηση

VHDL – 7 segment led


- Αποκωδικοποιεί τον κώδικα BCD (binary coded decimal) για να οδηγήσει μια οθόνη (LED ή LCD) 7 τμημάτων
 - Τμήματα: (g, f, e, d, c, b, a)

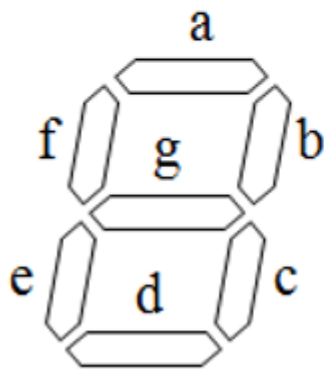

				
0111111	0000110	1011011	1001111	1100110
				
1101101	1111101	0000111	1111111	1101111

3^η Εργαστηριακή Άσκηση


7 segment led - Pmod

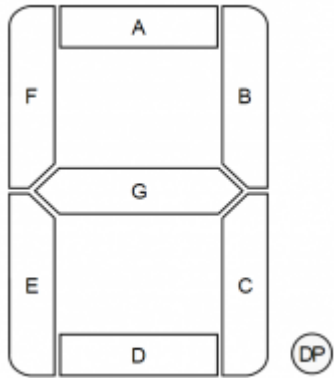

Pinout Description Table

Header J1			Header J2		
Pin	Signal	Description	Pin	Signal	Description
1	AA	Segment A	1	AE	Segment E
2	AB	Segment B	2	AF	Segment F
3	AC	Segment C	3	AG	Segment G
4	AD	Segment D	4	C	Digit Selection pin
5	GND	Power Supply Ground	5	GND	Power Supply Ground
6	VCC	Positive Power Supply	6	VCC	Positive Power Supply

Pmod

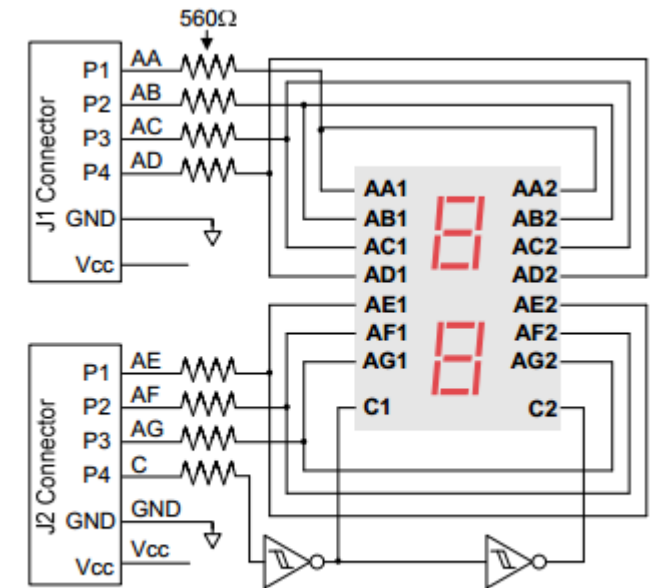

Seven-Segment Display Connection Diagram

ΜΟΝΟ ΤΟ ΈΝΑ ΑΠΌ ΤΑ 2 LED ΜΠΟΡΕΙ ΝΑ ΕΊΝΑΙ ΑΝΑΜΕΝΟ ΣΕ ΚΆΘΕ ΧΡΟΝΙΚΗ ΣΤΙΓΜΗ

Pmod: Peripheral Module interface

Εικόνες από το <https://reference.digilentinc.com/reference/pmod/pmodssd/reference-manual>

3^η Εργαστηριακή Άσκηση

7 segment led - Pmod

Table 16 - Pmod Connections

Pmod	Signal Name	Zynq pin	Pmod	Signal Name	Zynq pin
JA1	JA1	Y11	JB1	JB1	W12
	JA2	AA11		JB2	W11
	JA3	Y10		JB3	V10
	JA4	AA9		JB4	W8
	JA7	AB11		JB7	V12
	JA8	AB10		JB8	W10
	JA9	AB9		JB9	V9
	JA10	AA8		JB10	V8

Θα βρείτε σε ποια Signal της FPGA αντιστοιχούν τα signal του Pmod.
Κατόπιν θα βρείτε σε ποια pin της FPGA αντιστοιχούν τα signal του Pmod.

3^η Εργαστηριακή Άσκηση

ΠΡΟΧΩΡΗΣΤΕ ΣΤΗΝ ΑΣΚΗΣΗ



3^η Εργαστηριακή Άσκηση

Αρχιτεκτονική

```
result_temp<=unsigned('0'&a)+ unsigned('0'&b) when ctr='1' else  
    unsigned(a&'0') when ctr='0' else  
    (others=>'0');
```

Αρχιτεκτονική



```
result<=std_logic_vector(result_temp);  
  
with result_temp select  
seven_segment<="0111111" when "0000", --0  
    "0000110" when "0001", --1  
    "1011011" when "0010", --2  
    "1001111" when "0011", --3  
    "1100110" when "0100", --4  
    "1101101" when "0101", --5  
    "1111101" when "0110", --6  
    "0000111" when "0111", --7  
    "1111111" when "1000", --8  
    "1101111" when "1001", --9  
    "1000000" when others; -- "-"
```

```
digit_selection_out<=digit_selection_in;
```

Εργαστήριο Space Data Systems 2024-25 Δ.Βασιλόπουλος

3^η Εργαστηριακή Άσκηση

Constraints (1/2) – Switches + Leds

```
#####  
# On-board Slide Switches #  
#####
```

```
set_property -dict { PACKAGE_PIN M15  IOSTANDARD LVCMOS33 } [get_ports { digit_selection_in }];  
set_property -dict { PACKAGE_PIN H17  IOSTANDARD LVCMOS33 } [get_ports { ctr }];  
set_property -dict { PACKAGE_PIN H18  IOSTANDARD LVCMOS33 } [get_ports { b[1] }];  
set_property -dict { PACKAGE_PIN H19  IOSTANDARD LVCMOS33 } [get_ports { b[1] }];  
set_property -dict { PACKAGE_PIN F21  IOSTANDARD LVCMOS33 } [get_ports { b[0] }];  
set_property -dict { PACKAGE_PIN H22  IOSTANDARD LVCMOS33 } [get_ports { a[2] }];  
set_property -dict { PACKAGE_PIN G22  IOSTANDARD LVCMOS33 } [get_ports { a[1] }];  
set_property -dict { PACKAGE_PIN F22  IOSTANDARD LVCMOS33 } [get_ports { a[0] }];
```

```
#####  
# On-board Leds #  
#####
```

```
set_property -dict { PACKAGE_PIN U21  IOSTANDARD LVCMOS33 } [get_ports { result[3] }];  
set_property -dict { PACKAGE_PIN U22  IOSTANDARD LVCMOS33 } [get_ports { result[2] }];  
set_property -dict { PACKAGE_PIN T21  IOSTANDARD LVCMOS33 } [get_ports { result[1] }];  
set_property -dict { PACKAGE_PIN T22  IOSTANDARD LVCMOS33 } [get_ports { result[0] }];
```

Constraints



3^η Εργαστηριακή Άσκηση

Constraints (1/2) – Pmod

```
#####  
# PmodSSO                #  
#####
```

```
set_property -dict { PACKAGE_PIN Y11  IOSTANDARD LVCMOS33 } [get_ports { seven_segment[0] }];  
set_property -dict { PACKAGE_PIN AA11 IOSTANDARD LVCMOS33 } [get_ports { seven_segment[1] }];  
set_property -dict { PACKAGE_PIN Y10  IOSTANDARD LVCMOS33 } [get_ports { seven_segment[2] }];  
set_property -dict { PACKAGE_PIN AA9   IOSTANDARD LVCMOS33 } [get_ports { seven_segment[3] }];  
set_property -dict { PACKAGE_PIN W12   IOSTANDARD LVCMOS33 } [get_ports { seven_segment[4] }];  
set_property -dict { PACKAGE_PIN W11   IOSTANDARD LVCMOS33 } [get_ports { seven_segment[5] }];  
set_property -dict { PACKAGE_PIN V10   IOSTANDARD LVCMOS33 } [get_ports { seven_segment[6] }];  
  
set_property -dict { PACKAGE_PIN W8    IOSTANDARD LVCMOS33 } [get_ports { digit_selection_out }];
```

Constraints



3^η Εργαστηριακή Άσκηση


Pmod Manual

Manual LED

<https://reference.digilentinc.com/reference/pmod/pmodssd/reference-manual>


3^η Εργαστηριακή Άσκηση

RTL Design

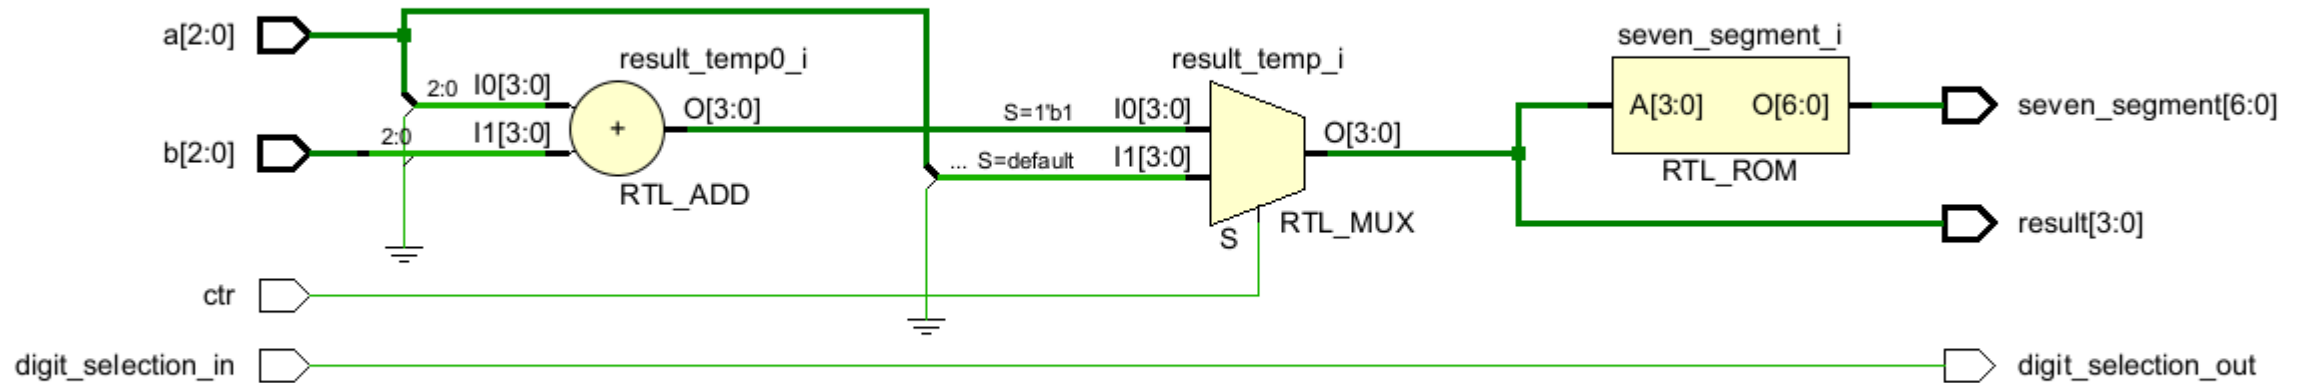


3^η Εργαστηριακή Άσκηση

RTL Design – ROM Module/ROM Values

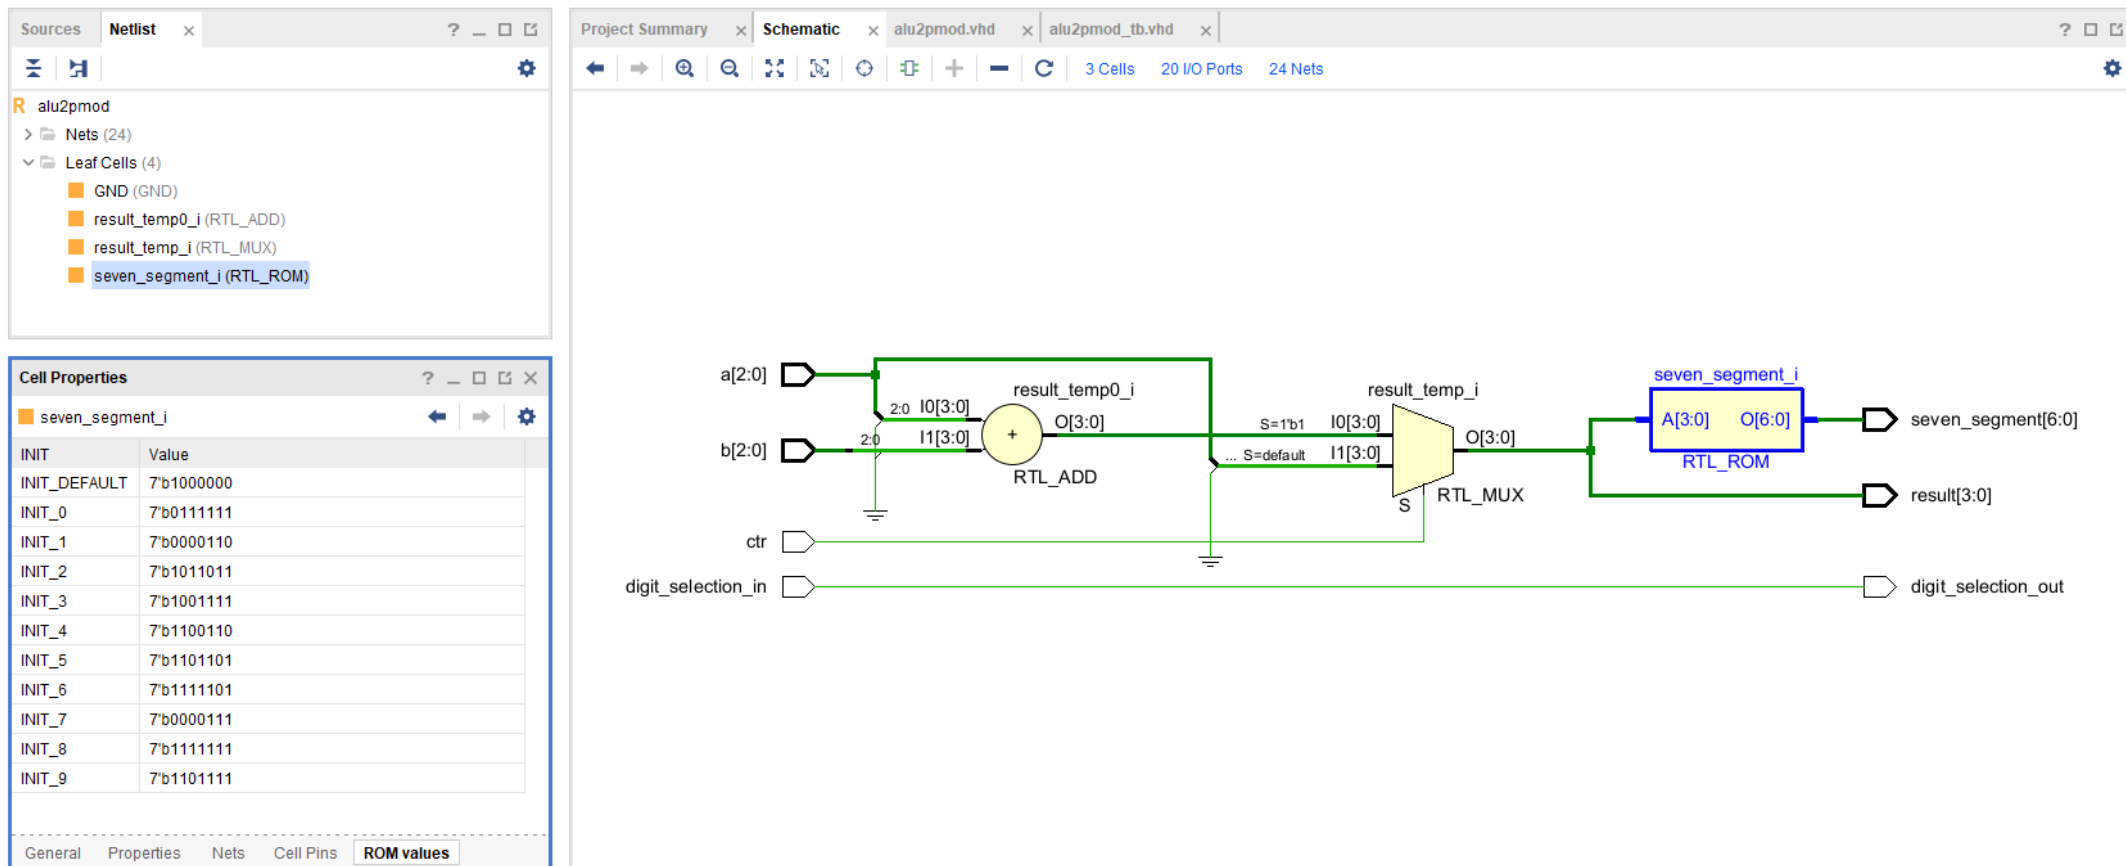

3^η Εργαστηριακή Άσκηση

Synthesis/Implementation – Schematic

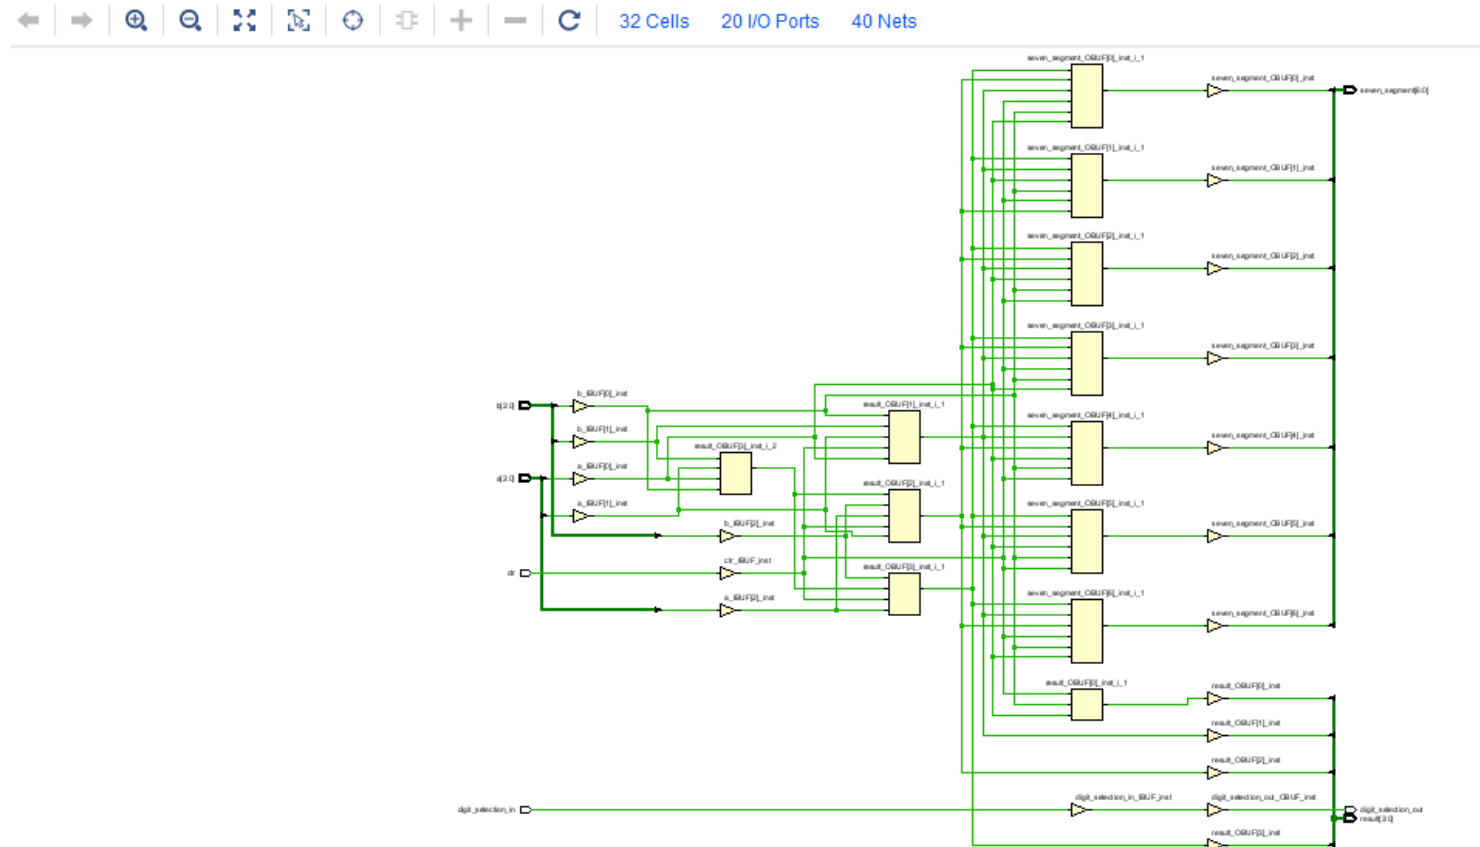



3^η Εργαστηριακή Άσκηση

Implementation – Report Utilization (1/3)

Και από Project Summary

Λιγότερα LUT από όσα δείχνει το schematic
Κάποια συγχωνεύονται (paired), κάποια παραμένουν (placed)

- Report DRC
- Report Noise
- Report Utilization**
- Report Power
- Schematic
- IMPLEMENTATION
 - Run Implementation
 - Open Implemented Design
- PROGRAM AND DEBUG
 - Generate Bitstream

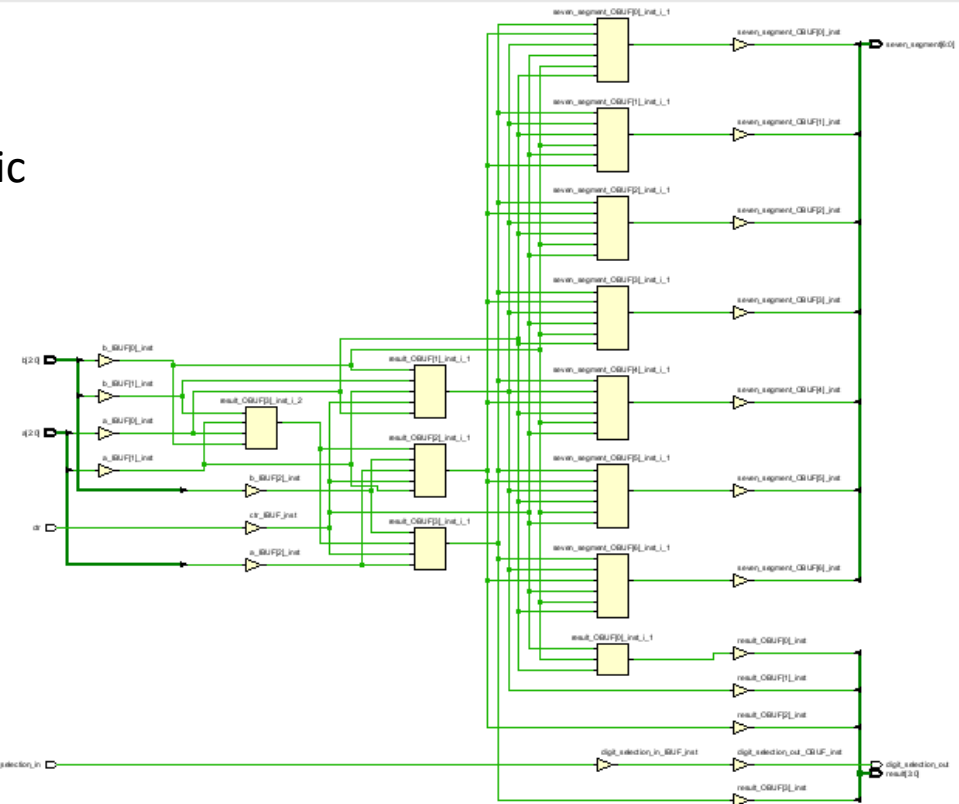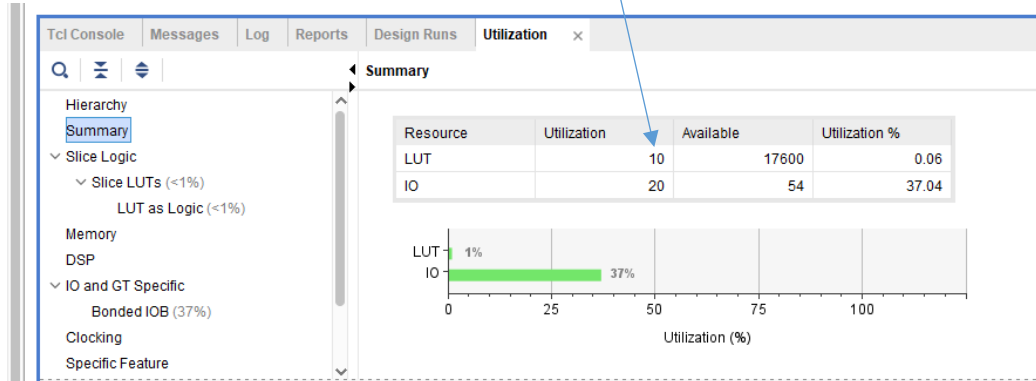

3^η Εργαστηριακή Άσκηση

Implementation – Report Utilization (2/3)

IMPLEMENTED DESIGN - xc7z010iclg225-1L

Sources Netlist x ? _ □ □

- seven_segment_OBUF[2]_inst_i_1 (LUT6)
- seven_segment_OBUF[3]_inst (OBUF)
- seven_segment_OBUF[3]_inst_i_1 (LUT6)
- seven_segment_OBUF[4]_inst (OBUF)
- seven_segment_OBUF[4]_inst_i_1 (LUT6)
- seven_segment_OBUF[5]_inst (OBUF)
- seven_segment_OBUF[5]_inst_i_1 (LUT6)
- seven_segment_OBUF[6]_inst (OBUF)
- seven_segment_OBUF[6]_inst_i_1 (LUT6)

Cell Properties ? _ □ □

result_OBUF[0]_inst_i_1

PRIMITIVE_GROUP	LUT
PRIMITIVE_LEVEL	LEAF
PRIMITIVE_SUBGROUP	others
PRIMITIVE_TYPE	LUT.others.LUT3
REF_NAME	LUT3
REUSE_STATUS	
SLR_INDEX	0
STATUS	PLACED

General Properties Power Nets Cell Pins

Project Summary x Device x alu2pmod.vhd x alu2pmod_tb.vhd x Schematic x

32 Cells 20 I/O Ports 40 Nets

The schematic diagram illustrates the implementation of the design. It features a central logic block, likely a LUT, connected to various input and output signals. The inputs are labeled with names like 'seven_segment_OBUF[2]_inst_i_1' and 'seven_segment_OBUF[3]_inst'. The outputs are labeled with names like 'seven_segment_OBUF[4]_inst' and 'seven_segment_OBUF[5]_inst'. The diagram shows a complex network of connections between these blocks, representing the logic implemented in the device.

3^η Εργαστηριακή Άσκηση

Implementation – Report Utilization (3/3)

IMPLEMENTED DESIGN - xc7z010iclg225-1L

Sources Netlist

- result_OBUF[2]_inst (OBUF)
- result_OBUF[2]_inst_i_1 (LUT5)
- result_OBUF[3]_inst (OBUF)
- result_OBUF[3]_inst_i_1 (LUT4)
- result_OBUF[3]_inst_i_2 (LUT4)
- seven_segment_OBUF[0]_inst (OBUF)
- seven_segment_OBUF[0]_inst_i_1 (LUT6)
- seven_segment_OBUF[1]_inst (OBUF)
- seven_segment_OBUF[1]_inst_i_1 (LUT6)

Cell Properties

result_OBUF[2]_inst_i_1

PRIMITIVE_LEVEL	LEAF
PRIMITIVE_SUBGROUP	others
PRIMITIVE_TYPE	LUT.others.LUT5
REF_NAME	LUT5
REUSE_STATUS	
SLR_INDEX	0
SOFT_HLUTNM	soft_lutpair0
STATUS	PLACED

Project Summary

Device: alu2pmod.vhd, alu2pmod_tb.vhd

Schematic

32 Cells, 20 I/O Ports, 40 Nets

3^η Εργαστηριακή Άσκηση

Implementation – Timing Reports (1/2)

The screenshot displays the Xilinx Vivado IDE. The top pane shows a schematic diagram of a circuit with various logic blocks and interconnections. The bottom pane shows the 'Timing Checks - Setup' report, which lists timing paths and their associated delays.

Path Properties for Path 11:

- Name: Path 11
- Slack: ∞ ns
- Source: a[1] (input port)
- Destination: seven_segment[6] (output port)
- Path Group: (none)
- Path Type: Max at Slow Process Corner
- Requirement: ∞ ns
- Data Path Delay: 9.472ns (logic 4.203ns (44.373%) route 5.269ns)

Timing Checks - Setup Report:

Name	Slack	Levels	Routes	High Fanout	From	To	Total Delay	Logic Delay	Net Delay	Logic %	Net %	Requirement	Source Clock	Destination Clock	Exception	Skew	Clot
Unconstrained Paths (1)																	
(none) (10)																	
Path 11	∞	5	4	8	a[1]	seven_segment[6]	9.472	4.203	5.269	44.4	55.6	∞	input port clock				
Path 12	∞	5	4	8	a[1]	seven_segment[4]	9.311	4.191	5.120	45.0	55.0	∞	input port clock				
Path 13	∞	5	4	8	a[1]	seven_segment[5]	9.083	4.185	4.898	46.1	53.9	∞	input port clock				
Path 14	∞	5	4	8	a[1]	seven_segment[3]	9.009	4.198	4.811	46.6	53.4	∞	input port clock				
Path 15	∞	5	4	8	a[1]	seven_segment[2]	8.989	4.181	4.809	46.5	53.5	∞	input port clock				

Menu Reports->Timing-Timing Reports


Setup Time:

Αναφέρεται στις αργές διαδρομές
(καθυστέρηση διάδοσης)

Τα μονοπάτια (path) με τους
χρόνους

3^η Εργαστηριακή Άσκηση

Implementation – Timing Reports (2/2)

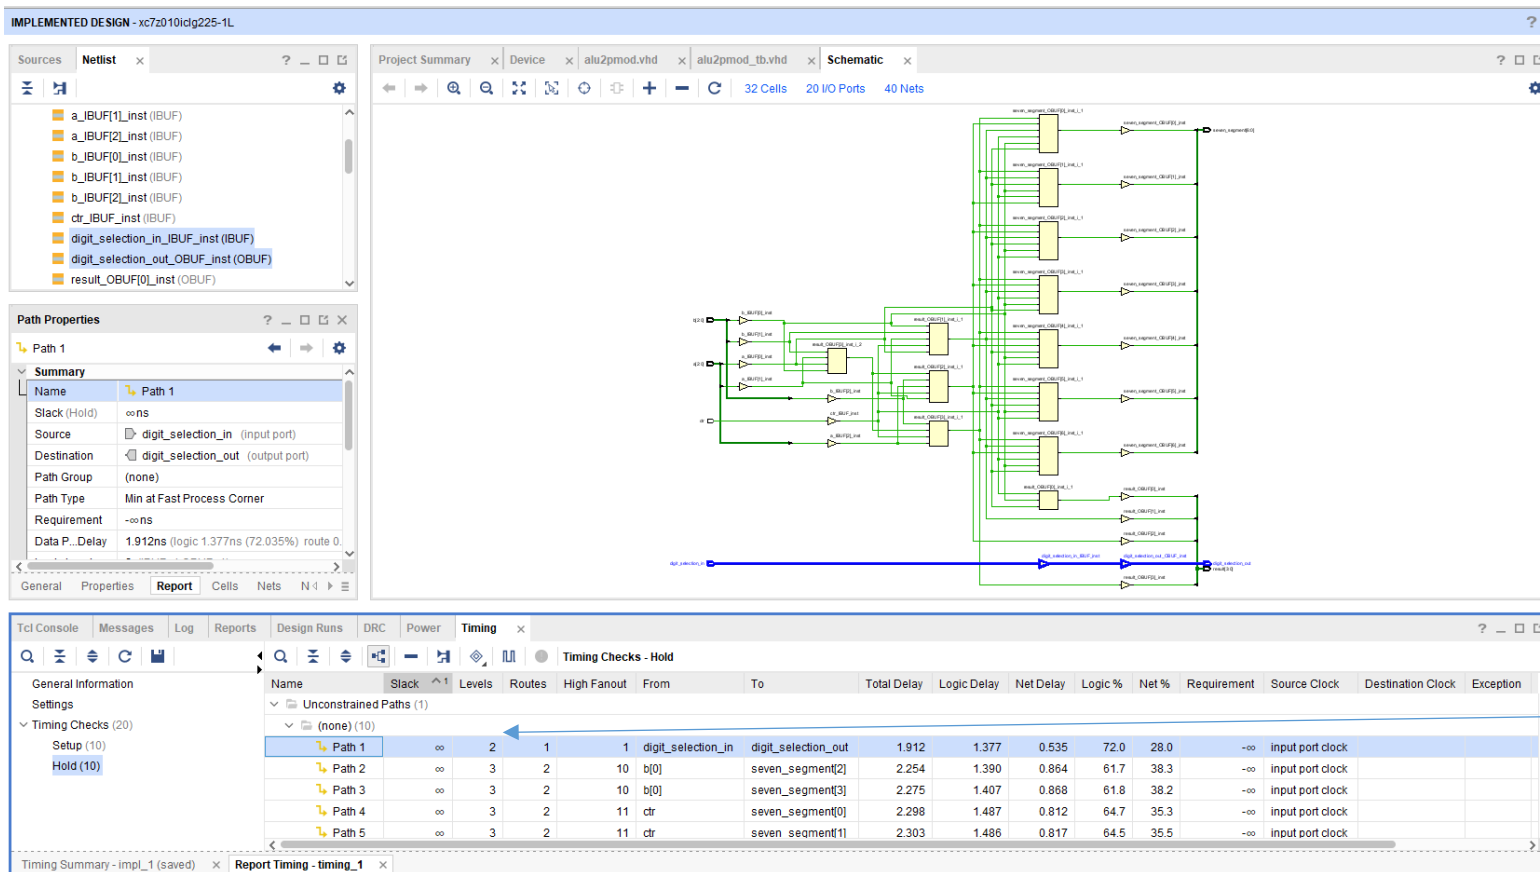

Hold Time:

Αναφέρεται στις γρήγορες διαδρομές (καθυστέρηση μόλυνσης)

Τα μονοπάτια (path) με τους χρόνους

3^η Εργαστηριακή Άσκηση

Implementation – Path Analysis

IMPLEMENTED DESIGN - xc7z010iclg225-1L

Sources Netlist

- a_IBUF[1]_inst (IBUF)
- a_IBUF[2]_inst (IBUF)
- b_IBUF[0]_inst (IBUF)
- b_IBUF[1]_inst (IBUF)
- b_IBUF[2]_inst (IBUF)
- ctr_IBUF_inst (IBUF)
- digit_selection_in_IBUF_inst (IBUF)
- digit_selection_out_OBUF_inst (OBUF)
- result_OBUF[0]_inst (OBUF)
- result_OBUF[0]_inst_1 (LUT3)
- result_OBUF[1]_inst (OBUF)

Path Properties

Path 11

Summary

Name Path 11

Slack ∞ ns

Source a[1] (input port)

Destination seven_segment[6] (output port)

Path Group (none)

Path Type Max at Slow Process Corner

Requirement ∞ ns

Data Path Delay 9.472ns (logic 4.203ns (44.373%) route 5.269ns (55.627%))

Logic Levels 5 (IBUF=1 LUT4=2 LUT6=1 OBUF=1)

Data Path

Delay Type	Incr (ns)	Path (ns)	Location	Netlist Resource(s)
net (fo=0)	(r) 0.000	0.000	Site: P10	a[1]
IBUF (Prop. ibuf 1 O)	(r) 0.966	0.966	Site: P10	a_IBUF[1]_instI
net (fo=3, routed)	1.589	2.556	Site: SLICE_X43Y7	a_IBUF[1]
LUT4 (Prop. lut 11 O)	(r) 0.124	2.680	Site: SLICE_X43Y7	result_OBUF[3]_inst_i_2/1
net (fo=2, routed)	0.433	3.112	Site: SLICE_X43Y7	result_OBUF[3]_inst_i_2/O
LUT4 (Prop. lut 11 O)	(r) 0.150	3.262	Site: SLICE_X43Y7	result_OBUF[3]_inst_i_1/1
net (fo=8, routed)	1.575	4.837	Site: SL...E_X43Y14	result_OBUF[3]
LUT6 (Prop. lut 10 O)	(r) 0.326	5.163	Site: SL...E_X43Y14	seven_segment_OBUF[6]_inst_i_1/0
net (fo=1, routed)	1.672	6.836	Site: SL...E_X43Y14	seven_segment_OBUF[6]_inst_i_1/O
OBUF (Pr. buf 1 O)	(r) 2.637	9.472	Site: R13	seven_segment_OBUF[6]_instI
net (fo=0)	0.000	9.472	Site: R13	seven_segment[6]

Timing Checks - Setup

Name	Slack	Levels	Routes	High Fanout	From	To	Total Delay	Logic Delay	Net Delay	Logic %	Net %	Requirement	Source Clock	Destination Clock	Exception	Skew	Clock
Unconstrained Paths (1)																	
(none) (10)																	
Path 11	∞	5	4	8	a[1]	seven_segment[6]	9.472	4.203	5.269	44.4	55.6	∞	input port clock				

Δεξί κλικ στο Path και
[View Path Report](#)

3^η Εργαστηριακή Άσκηση

Implementation – Simulation

```
test: process is  
begin
```

```
ctr_tb<='1';          //Add  
a_tb<="100";b_tb<="011";wait for 20ns;  
a_tb<="100";b_tb<="100";wait for 20ns;
```

```
ctr_tb<='0';          //Multiply  
a_tb<="000";b_tb<="011";wait for 20ns;  
a_tb<="010";b_tb<="100";wait for 20ns;  
a_tb<="100";b_tb<="100";wait for 20ns;  
a_tb<="111";b_tb<="100";wait for 20ns;
```

```
end process test;
```